


EMI Filter, Feed-thru Hermetic

4020-145A

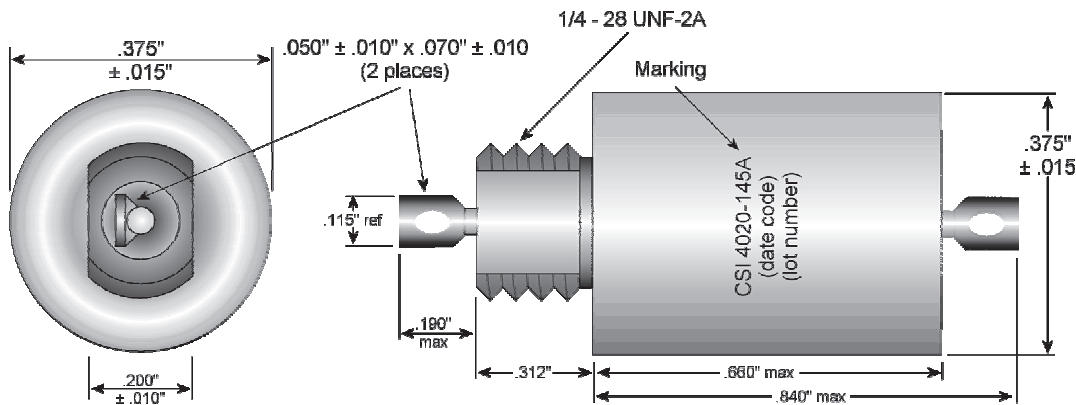

Electrical Specifications	
Operating Voltage:	50 VDC
Operating Temperature:	-55° C to +125° C
Operating Current:	10.0 Amp
Capacitance:	1.4 μ f minimum
DCR:	.01 Ω max

Drawings may not be to scale; refer to dimensions.

Insertion Loss

15 dB	@ 30 kHz
28 dB	@ 150 kHz
33 dB	@ 300 kHz
44 dB	@ 1 MHz
61 dB	@ 10 MHz
70 dB	@ 1 GHz

Part Number includes:

- 1 each P/N 082-000-001ETL (not shown for clarity)
- 1 each P/N 084-000-001ETL (not shown for clarity)

