

CHIP ATTENUATORS


WIRE BONDABLE TERMINALS

RNCA2-XXVWB




General Specifications

Substrate: Alumina
 Resistive Material: Thick Film
 Terminals: Wire Bondable Gold
 (See Ordering Information Below)
 Temperature Range: -55°C to +150°C
 Power Rating: 2 Watts

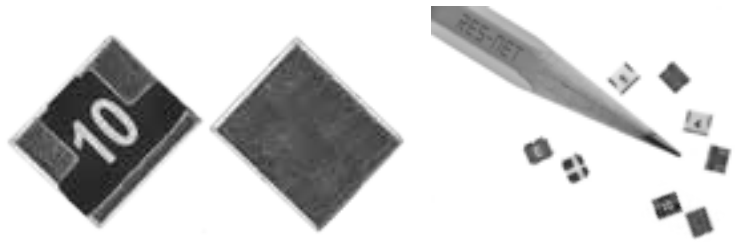


Attenuation (dB)	Attenuation Accuracy (dB)	Frequency (GHz)	VSWR (max)
0 – 3	±0.3 ±0.5	DC-4.0 4.0-8.0	1.25:1 1.50:1
4 – 6	±0.4 ±0.5	DC-4.0 4.0-8.0	1.25:1 1.50:1
7 – 10	±0.5 ±0.5	DC-4.0 4.0-8.0	1.25:1 1.50:1
11 – 15	±0.75 -3.0/+0.5	DC-4.0 4.0-8.0	1.25:1 1.50:1
16 - 20	±1.0 -4.0/+0.5	DC-4.0 4.0-8.0	1.25:1 1.50:1

RNCA2-XXVWB

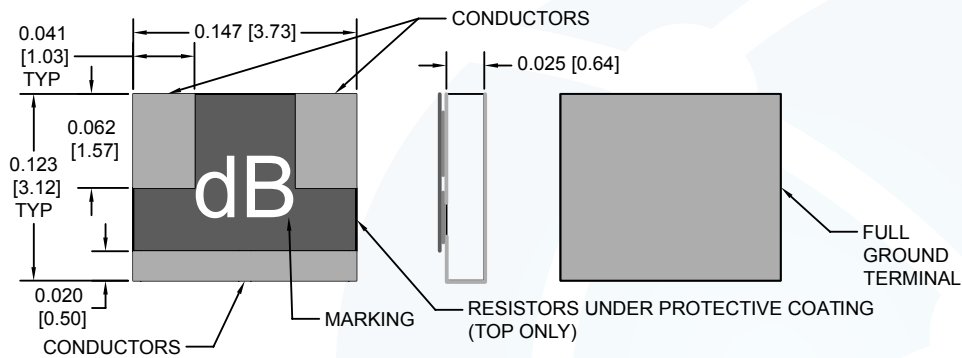

Ordering Information:

Example:

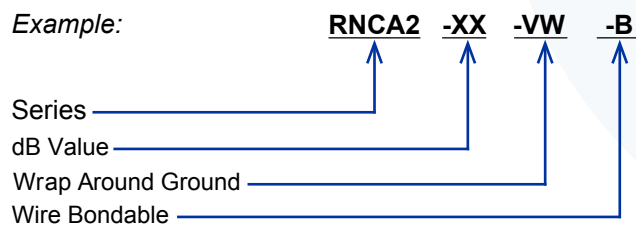

DERATING CURVE

