

COAXIAL ATTENUATORS

CONVECTION COOLED


N-TYPE RA SERIES

General Specifications

Connectors: N-Type Brass Nickel Plated
 Pins: Gold Plated Brass (Male); Gold Plated Beryllium Copper (Female)
 Housing: Black Anodized Aluminum
 Impedance: 50 Ohms
 Power rating 10W
 Temperature Range: -55°C to +125°C



Part Number	Attenuation Accuracy (dB)					Frequency (GHz)	VSWR (max)
	1-9	10	20	30	40		
RA010-2NMF-dB	±0.4	±0.4	±0.4	±0.5	±0.5	DC-2.0	1.15:1
RA010-3NMF-dB	±0.4	±0.5	±0.6	±0.6	±0.8	DC-3.0	1.20:1
RA010-4NMF-dB	±0.5	±0.6	±0.6	±0.6	±0.8	DC-4.0	1.20:1
RA010-6NMF-dB	±0.5	±0.6	±0.6	±0.6	±0.8	DC-6.0	1.25:1

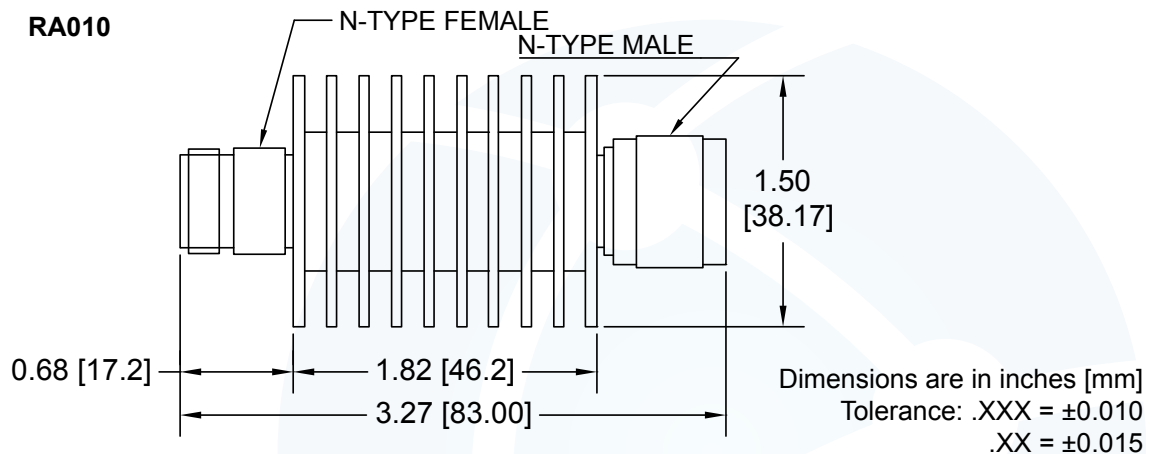

Ordering Information:

Example: **RA0 10 -4 NMF -dB**

Series ↑
 Power (W) ↑
 MAX Frequency (GHz) ↑
 12 = 12.4
 26 = 26.5
 N: N-Type ↑
 S: SMA
 Male & Female Connectors
 See Tables For Available Values ↑

