



## Miniature Ceramic Feed-thru EMI Filters and Capacitors – Ref: Mil-F-15733


### 7110/7112 Series

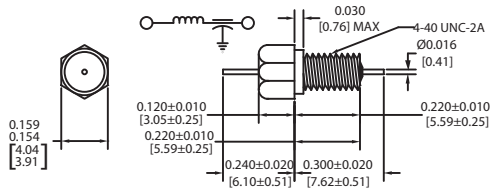


### 7220 Series

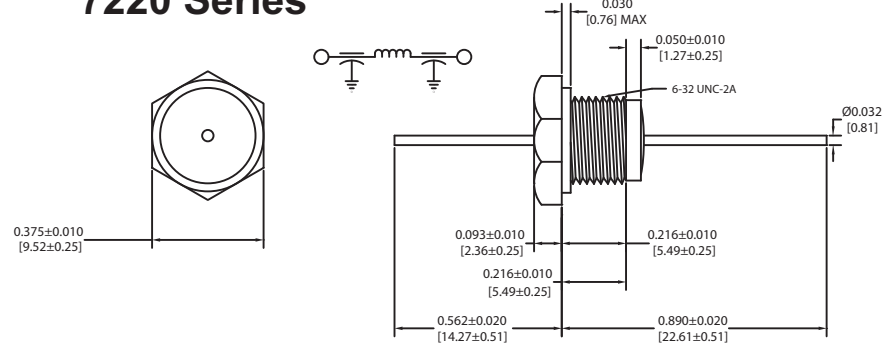

### 7410/7420 Series

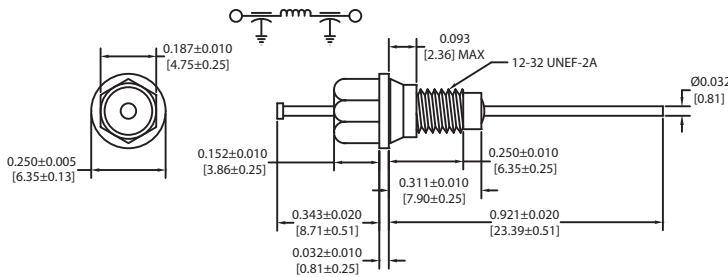

### 7510/7520 Series

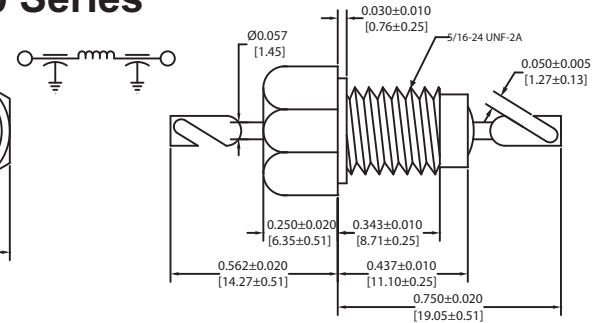

Part No	Min Cap µf	Working Voltage	Minimum Insertion Loss (dB)					Max DCR (ohms)	Rated DC Current
			1 MHz	10 MHz	100 MHz	200 MHz	1 GHz		
7110-000	.027	100 VDC L-Section	10	30	50	54	>70	.01	10
7112-000	.027	100 VDC L-Section	10	30	50	54	>70	.01	5
7220-000	.015	200 VDC Pi-Section	—	8	48	60	>70	.01	10
7410-000	.10	100 VDC Pi-Section	—	28	>70	>70	>70	.01	10
7420-000	.012	200 VDC Pi-Section	—	25	66	>70	>70	.01	10
7510-000	.10	100 VDC Pi-Section	10	40	>70	>70	>70	.003	25
7520-000	.02	200 VDC Pi-Section	—	27	>70	>70	>70	.003	25

Drawings are to scale.